ProFeeder X

Higher production capacity





ProFeeder X

LARGE PRODUCTION

Delivered with 2,5 or 10 trays options ideally to lower cycle time resulting in fast production. Robot arms can be mounted in different angles allowing its ultimate flexibility.

2 LOCKING SYSTEMS AVAILABLE

Mechanical or Air locking systems available. Airlocks run in Modbus.

MOVE AROUND PRODUCTION

pedant

Placement for KTS boxes


Scalable tray systems

Very compact -

L980*W920*H1006

Want to scale production and reduce cycle time at your factory floor? The ProFeeder X is a robust machine designed to handle multiple parts in several trays

UP TO 10 TRAYS

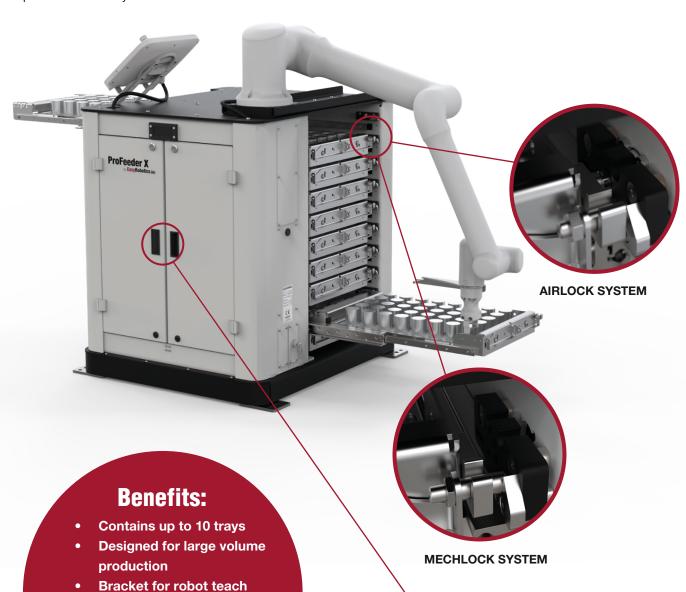

INTEGRATED

COMPARTMENT FOR

CONTROLLER BOX





| Product order overview | | |
|------------------------|--|--|
| PFX-1010-03 | ProFeeder X 3x 60kg tray w. Mechlock | H: 1050 mm, W: 980, L: 920, Wt: 320 kg, 3x 350x550mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 60kg/tray, Max part height 240mm, Mechlock |
| PFX-1011-03 | ProFeeder X 3x 60kg tray w. Airlock | H: 1050 mm, W: 980, L: 920, Wt: 335 kg, 3x 350x550mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 60kg/tray, Max part height 240mm, Airlock |
| PFX-1010-06 | ProFeeder X 6x 60kg tray w. Mechlock | H: 1050 mm, W: 980, L: 920, Wt: 365 kg, 6x 350x550mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 60kg/tray, Max part height 120mm, Mechlock |
| PFX-1011-06 | ProFeeder X 6x 60kg tray w. Airlock | H: 1050 mm, W: 980, L: 920, Wt: 380 kg, 6x 350x550mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 60kg/tray, Max part height 120mm, Airlock |
| PFX-1100-05 | ProFeeder X 5x 120kg tray w. Mechlock | H: 1050 mm, W: 980, L: 920, Wt: 415 kg, 5x 550x350mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 120kg/tray, Max part height 160mm, Mechlock |
| PFX-1101-05 | ProFeeder X 5x 120kg tray w. Airlock | H: 1050 mm, W: 980, L: 920, Wt: 430 kg, 5x 550x350mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 120kg/tray, Max part height 160mm, Airlock |
| PFX-1100-10 | ProFeeder X 10x 120kg tray w. Mechlock | H: 1050 mm, W: 980, L: 920, Wt: 535 kg, 10x 350x550mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 120kg/tray, Max part height 80mm, Mechlock |
| PFX-1101-10 | ProFeeder X 10x 120kg tray w. Airlock | H: 1050 mm, W: 980, L: 920, Wt: 550 kg, 10x 350x550mm tray area, T-Pad bracket, Compartment for controller, 2,5mm deflection at 120kg/tray, Max part height 80mm, Airlock |

Danish manufacturer and supplier of robotic cells for all types of automation.



EasyRobotics ApS Mommarkvej 5 DK-6400 Sønderborg Phone: +45 31 25 06 02 info@easyrobotics.dk www.easyrobotics.biz

